


DYNAPAC

Part of the Atlas Copco Group

CC1200C Combi rollers



Technical data

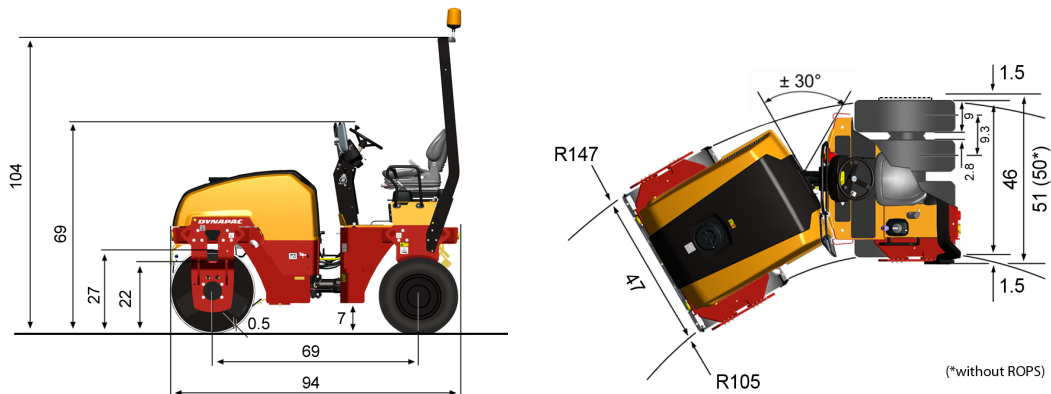

Masses	CC1200C
Max. operating mass	5,700 lbs
Operating mass (incl. ROPS)	5,400 lbs
Module mass (front/ rear)	2,800/ 2,600 lbs
Propulsion	
Speed range	0-7
Theor. gradeability	60 %
Compaction	
Wheel load	639 (lbs/ wheel)
Tire type (smooth)	640x240-15
Centrifugal force	6,100 lb
Nominal amplitude	0.020 in
Static linear load	59 lbs/ in
Vibration frequency	3,480 vpm
Water tank	42 gal
Emulsion tank	8 gal
Engine	
Manufacturer/ Model	Kubota D1703- M
Type	Water cooled
Rated power, SAE J1995	35 hp @ 2,800 rpm
Fuel tank capacity	13 gal
Hydraulic system	
Driving	Axial piston pump with variable displacement. Radial piston motors (3) with constant displacement.
Vibration	Gear pump/ motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc on drum and wheel motors.

Dynapac USA

3700 East 68th Avenue, Commerce City, CO 80022 Phone: 800-732-6762 Fax: 303-288-8828

Find your local dealer at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.