

# Dynapac CA6000D

## Single drum vibratory rollers



### Technical data



#### Masses

Operating mass (incl. ROPS)	42,557 lbs
Operating mass (incl. Cab)	43,000 lbs
Module mass (front/rear)	28,200 lbs/14,800 lbs
Max. operating mass	43,700 lbs



#### Dimensions

Drum width	84 in
------------	-------



#### Propulsion

Speed range	2-7 (mph)
Vertical oscillation	±9 °
Tire size (12 ply)	23,1 x 26 AW
Theor. gradeability	45 %



#### Compaction

Static linear load	336 lbs/in
Nominal amplitude (high/low)	0.083 in/0.031 in
Vibration frequency (high/low amplitude) SEISMIC available (values for manual mode)	1,740 vpm/1,800 vpm
Centrifugal force (high/low amplitude)	80,940 lb/33,720 lb



#### Engine

Manufacturer/Model	Cummins B4.5 (Stage V /T4final)
Type	Water cooled turbo diesel
Rated power, SAE J1995	149 kW (200 hp) @ 2,200 rpm
Fuel tank capacity	67 gal
DEF tank capacity	8 gal



#### Engine

Manufacturer/Model	TCD2012L06 (IIIA/T3)
Type	Water cooled turbo Diesel
Rated power, ISO 14396	150 kW (204 hp ) @ 2,200 rpm



#### Hydraulic system

Driving	Hydrostatic
Vibration	Hydrostatic
Steering	Hydrostatic
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.

Find us locally at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.



dynapac\_ca6000d\_us-20200310.093646.pdf 2020-03-10 09:36

# Dynapac CA6000D

## Single drum vibratory rollers



### Technical data

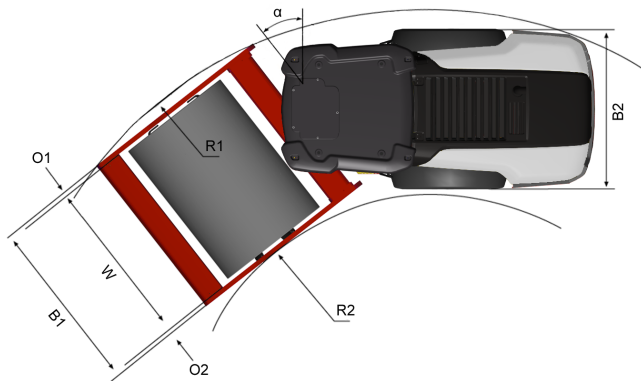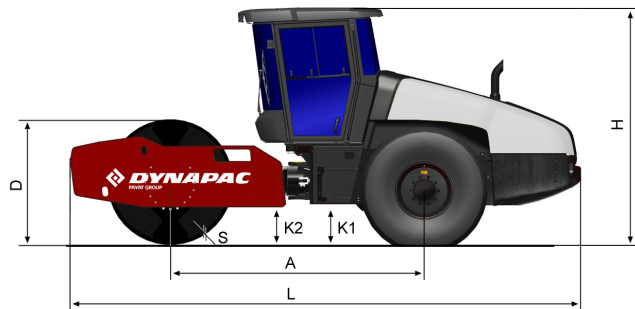

Dimensions	
A. Wheelbase	122 in
B1. Width, front	92 in
B2. Width, rear	84 in
D. Drum diameter	61 in
H1. Height, with ROPS/cab	114 in
H2. Height, w/o ROPS/cab	84 in
K1. Ground clearance	18 in
K2. Curb clearance	18 in
L. Length	246 in
O1. Overhang, right	4 in
O2. Overhang, left	4 in
R1. Turning radius, outside	19 ft
R2. Turning radius, inside	11 ft
S. Drum shell thickness	1.89 in
W. Working width	84 in
α. Steering angle	±38°



#### Standard equipment

- 24V outlet socket, operator's platform
- AntiSpin drive system
- Automatic vibration control
- Back up alarm
- Brake release
- Comfort Cab
- Cross Mounted Engine
- Combi cooler with Hydraulically driven fan
- Display: Engine temp, Fuel level, Hydr. temp, Speedometer, Tachometer, Voltage
- ECO mode
- Emergency stop
- Filler cap inside lockable hood
- Hydraulic checkpoints
- Parking brake
- Rear axle, No-Spin
- **Seismic with Compaction Meter including Active Bouncing Control**
- Shock mounted platform
- Steering wheel, adjustable
- Suspension seat, swivelling
- Storage Compartment
- Vandal cover
- Warning lights: Air cleaner, Brake, Clogged hyd. fluid filter, Engine oil pressure/temp, Hyd oil temp, Low charge, Low fuel
- 1m X 1m Visibility
- Zero spill oil & coolant change

Find us locally at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac\_ca6000d\_us-20200310.093646.pdf 2020-03-10 09:36