


Dynapac F1250CS


Compact pavers





Technical data


 Masses	
Mass (incl. standard screed)	7.0 t


 Dimensions	
Basic width	1.20 m
Working width, max.	3.50 m
Working width, hydraulic extendable	2.40 m
Working width, minimum (with reducing shoe)	0.30 m
Front ramp angle	14°


 Capacity	
Paving thickness (max/min)	200 /-150 mm
Theoretical placement capacity	300 t/h


 Undercarriage	
Crawler length	1390 mm
Crawler width	200 mm
Final drive	Direct drive over transmissions


 Traction	
Paving speed	up to 27 m/min
Transport speed	3.3 km/h

 Operation	
Operator console	Slidable left/right
Platform	Extendable platform

 Engine	
Manufacturer/Model	Deutz TD2.9 L4
Emissions according to	Tier 3/Tier 4
Rated power	54 kW (72 hp) @ 2200 rpm
Electrical system	2 x 24V, 72 Ah
Fuel tank capacity	85 l

 Material hopper	
Capacity	2.5 m³ (5.5 t)
Dumping height, center	570 mm
Hopper width, internal	2830 mm

 Conveyor	
Conveyor type	Splitted conveyor drive with center cover
Conveyor width	620 mm
Conveyor control	Automatic with limit switches

 Auger	
Auger diameter	320 mm
Auger control	Automatic with ultrasonic sensor
Auger height adjustment	Infinitely variable by 150 mm

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



dynapac_f1250cs_en-20201014.090525.pdf 2020-10-14 09:05

Dynapac F1250CS

Compact pavers



Technical data

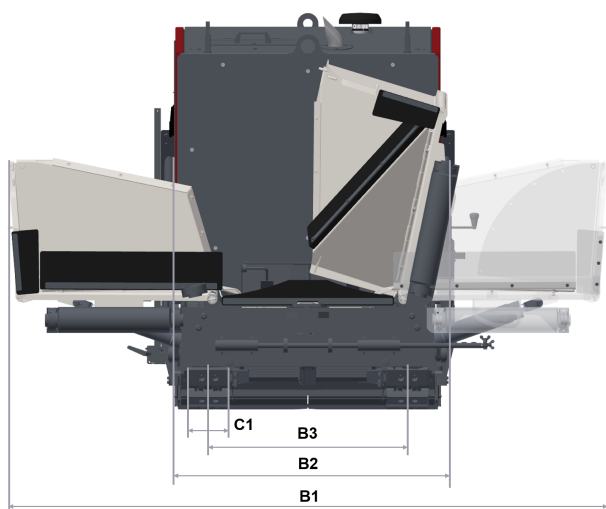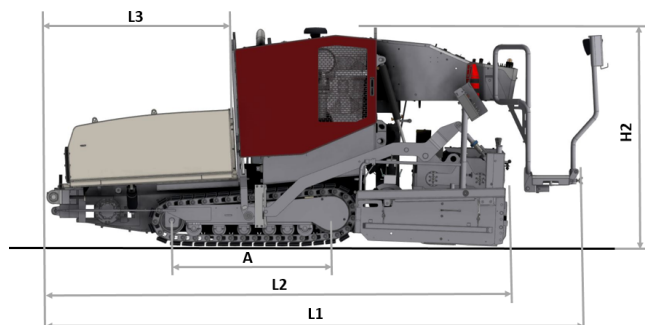

Dimensions

A. Axle track	1390 mm
B1. Width, max.	2820 mm
B2. Width, standard	1430 mm
B3. Width, center of tracks	940 mm
C1. Track width	200
H2. Height, transport	2020 mm
L1. Length, total	4760 mm
L2. Length, transport	4450 mm
L3. Length, hopper	1640 mm



Standard equipment

2 front & 2 rear lights, Conventional electrics, Conveyor reversible (splitted), Dashboard with toggle switches, Eco Mode, Extendable steps operator platform, Hopper hydraulic separate control, Mechanical auger height adjustm., Mechanical conveyor limit switches, Ultrasonic sensors auger



Optional equipment

Back-up alarm, Cut off shoes (250mm or 350mm), Emulsion spray equipment (Gloria), Emulsion spray equipment, pump, hose dispenser, Fire extinguisher, First aid kit, Foldable material guide plates, LED lights, Light for auger compartment, Material laying kit (left or right), Panolin bio hydraulic oil, Remote steering device, Rotating flashing beacon, Side shield easy adjust, Special painting, Working widths

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_f1250cs_en-20201014.090525.pdf 2020-10-14 09:05